



## About Reefervan

With over **35** years of industry experience, we manufacture and distribute a variety of quality O.E.M reefer products and van insulation kits across **North America**.

All reefer & insulation products have:

- **3 Year warranty**
- **Lowest** service replacement parts cost guaranteed
- **Tech-friendly** design

**INSULATION KITS AVAILABLE !**



## Contact Us



+1 888-445-4481



4-3610 Odyssey Drive,  
Mississauga, Ontario, Canada  
L5M 0Z9



[sales@reefervan.com](mailto:sales@reefervan.com)



[www.reefervan.com](http://www.reefervan.com)



**Scan the QR code to learn  
more about our reefers!**

**REEFER** VAN



**RV11**

Road Only Direct Drive  
Operation Reefer



**+1 888-445-4481**

## RV11 Features

The **RV11** Reefer is engineered for the North American market, delivering reliable performance for fresh or frozen applications on regular to medium sized vans.



RV11 Evaporator




RV11 Condenser

- 10,000 BTU Cooling Capacity
- R452A refrigerant compatible
- 3 high capacity cooling fans
- VALEO Road Compressor
- CPR compressor protection valve
- Auto hot gas defrost

## RV11 Benefits

- ✓ Fast & Easy Installation
- ✓ 3-Year Warranty protection
- ✓ Superior cooling performance
- ✓ Simple temperature control - cab command (°F / °C)
- ✓ Extended service life
- ✓ Maximum cargo space with slim cooler design
- ✓ Extended service life
- ✓ Easy fault diagnosis through LED indicators

Van Insulation Kits

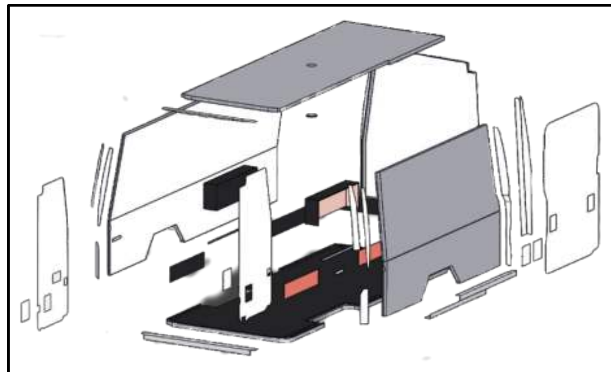

Quality Without the Premium Price

## RV11 Specifications\*

Specification	Value
Compressor	TM15
Defrost	Hot Gas
Refrigerant	R404A (R452A)
Refrigerant Charge	3.3 LB (1.5 KG)
AMP Draw (12VDC / AC)	38A
Condenser Weight	49 LB (22 KG)
Evaporator Weight	60 LB (27 KG)
Condensor Dimension	44.5"x 24.5"x 6.8" (1130 x 622 x 173mm)
Evaporator Dimension	47.5"x 23"x6" (1207 x 584 x 152mm)
Air Flow	1375 CFM
Vehicle Application	Medium Roof Chill
Road Cooling 35°F (2°C)	10000 BTU/H (2930 W)
Road Cooling 0°F (-18°C)	5650 BTU/H (1655 W)

\*Ambient 100°F (38°C); Assume min. 3" of insulation for 35°F (2°C) and min. 4" of insulation for 0°F (-18°C) with polar walls